

# Assembly & Installation Instructions

## 7.1 : ROD FLOOR TO CEILING

APPROVED  
By dwilliams at 9:50 am, Jun 22, 2010

### Installation for Rod (6mm/12mm)

1. Secure ceiling fixing (R.2) to ceiling and floor fixing (R.3) to floor using blocking and no. 8 screws (by others) (align using plumb line).

2. Screw on threaded collar to end of top rod section (R.1) and secure with grub screw - using allen key provided.

3. Thread male sleeve (R.2) onto rod (R.1) and insert threaded collar and male sleeve (R.2) into ceiling fixing plate (R.2) and secure using grub screws.


4. Join remaining rods (R.1) and cut to length 1/16" short above floor fixing plate (R.3).

5. Thread male sleeve (R.3) and collar (R.3) onto rod (R.1) and secure using grub screw.

6. Insert and rotate threaded male sleeve (R.3) into floor fixing plate (R.3) tensioning out rod, tighten by hand.

PLEASE NOTE: Some components may require install onto ROD prior to securing bottom piece.

PLEASE NOTE: It is important to add adequate blocking to hold desired display weight loads. Questions? Please contact your B&N representative.

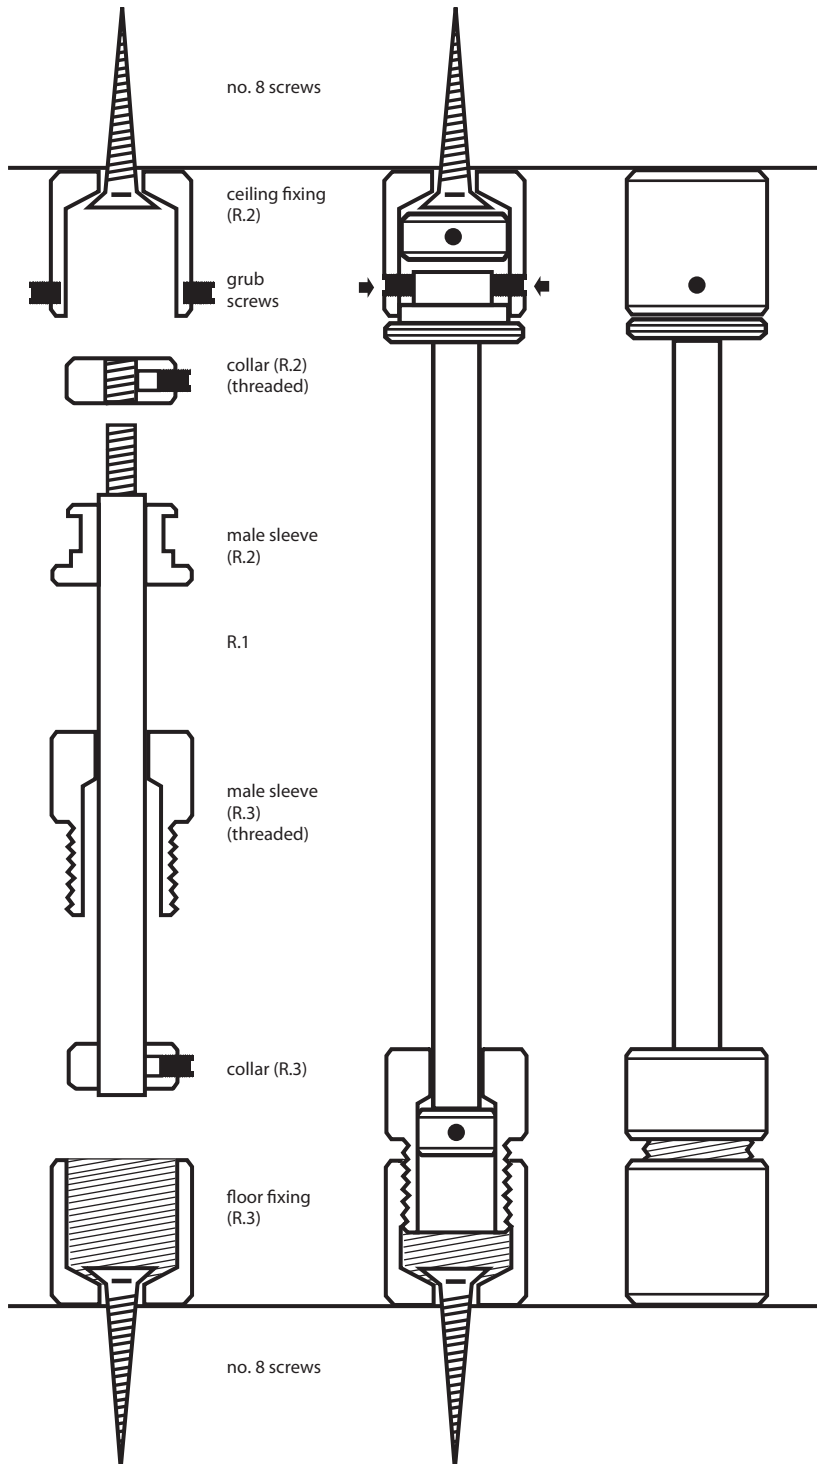

B&N INDUSTRIES  
650.593.4127  
WWW.BNIND.COM